


## Inch Series Tapered Roller Bearings

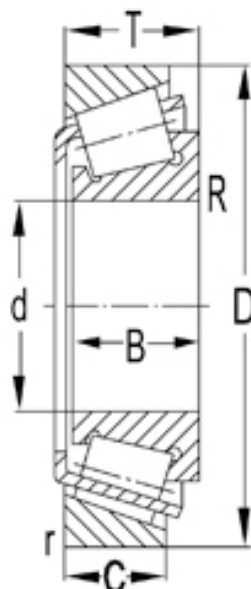

N° de rodamiento:	Dimensiones límite (mm)			Capacidades de carga básicas (kN)			Velocidad límite (rpm)		Peso (kilogramos)
	d	Dimensión	t	Dinámico(Cr)	Estático (Cor)	PU	Clasificaciones de velocidad	Limitar la velocidad	
03062/03162/Q	15,875	41,275	14,288	25,5	21,2	2,16	15000	20000	0,090
11590/11520/Q	15,875	42,862	14,288	17,6	17,6	1,83	12000	17000	0,10
LM11749/710/Q	17,462	39,878	13,843	24,5	20,8	2,12	15000	20000	0,081
LM11749/710/QVC027	17,462	39,878	13,843	24,5	20,8	2,12	15000	20000	0,081
LM11949/910/Q	19,050	45,237	15,494	31,5	27,5	29	13000	18000	0,12
09067/09195/Q	19,050	49,225	19,845	39,1	40	4,3	11000	17000	0,17
09074/09195/QVQ494	19,050	49,225	19,845	39,1	40	4,3	11000	17000	0,18
LM12748/710	21,430	45,237	15,494	27,5	31	3,2	11000	17000	0,12
M12649/610/Q	21,430	50,005	17,526	42,5	38	4,15	12000	16000	0,17
LM12749/710/Q	21,986	45,237	15,494	31,5	31	3,2	12000	17000	0,12
LM12749/711/Q	21,986	45,974	15,494	31,5	31	3,2	12000	17000	0,12
1380/1328/Q	22,225	52,388	19,368	48	44	4,8	11000	15000	0,20
07100S/07210X/Q	25,400	50,800	15,011	32	30,5	3,15	11000	15000	0,13
15578/15520	25,400	57,150	17,462	40,2	45,5	4,9	9000	13000	0,23
M84548/2/510/2/QVQ506	25,400	57,150	19,431	45,5	45	5	10000	13000	0,23
15101/15245	25,400	62	19,050	48,4	57	6,2	9500	14000	0,31
15103S/15243/Q	26,157	61,912	19,050	56	57	6,2	9000	12000	0,29
15103S/15245/Q	26,157	62	19,050	56	57	6,2	9000	12000	0,29
L44649/610/Q	26,988	50,292	14,224	30	30	3,05	11000	15000	0,11
1982F/1924A/QVQ519	27,500	57,150	19,845	52	51	5,6	10000	13000	0,22
1985/1922/Q	28,575	57,150	19,845	54	55	6	10000	13000	0,22
1988/1922/Q	28,575	57,150	19,845	47,3	55	6	9000	13000	0,22
M86647/610/QCL7C	28,575	64,292	21,433	56	61	6,8	8500	11000	0,35

## Inch Series Tapered Roller Bearings

02872/02820/Q	28,575	73,025	22,225	99	140	15	7000	10000	1,05
L45449/410/Q	29,000	50,292	14,224	30	32,5	3,35	11000	14000	0,11
M86649/2/610/2/QVQ506	30,162	64,292	21,433	56	61	6,8	8500	11000	0,33
M88043/010/2/QCL7C	30,162	68,262	22,225	63	69,5	7,8	8000	11000	0,41
15123/15243/Q	31,750	61,912	19,050	56	57	6,2	9000	12000	0,24
15123/15245/Q	31,750	62	19,050	56	57	6,2	9000	12000	0,24
HM88542/510/Q	31,750	73,025	29,370	70,4	95	10,4	6700	10000	0,62